



STULZ the natural choice

CyberAir

the new world of close control
air conditioning






CyberAir Questioning the status quo

To develop the extraordinary, STULZ questioned the status quo and set new standards with CyberAir for reliability and innovation in precision air conditioning units.

Using and further developing trend-setting technologies, STULZ offers unknown benefits in safety, cost reduction and environmental compatibility.

One thing does not change with CyberAir: STULZ can always be trusted to provide reliability and quality.

» **CyberAir units offer the highest cooling capacities with the lowest footprint, operating costs and noise level designed to meet the needs of the latest high density IT Servers**



» **Mission Critical applications rely on STULZ CyberAir for the next generation of IT cooling**




Source: IBM Deutschland GmbH



- » CyberAir units utilise the latest EC fan technology and achieve revolutionary energy savings.
- » The C7000 microprocessor provides the CyberAir unit with reliable precision control and monitoring of the environment with the ability to exchange data with Building Management Systems.
- » CyberAir units are built to the highest quality standards in a modern facility only using quality components.
- » CyberAir, the complete precision air conditioning range up to 150 kW per unit, available in 8 cooling designs and 5 sizes.



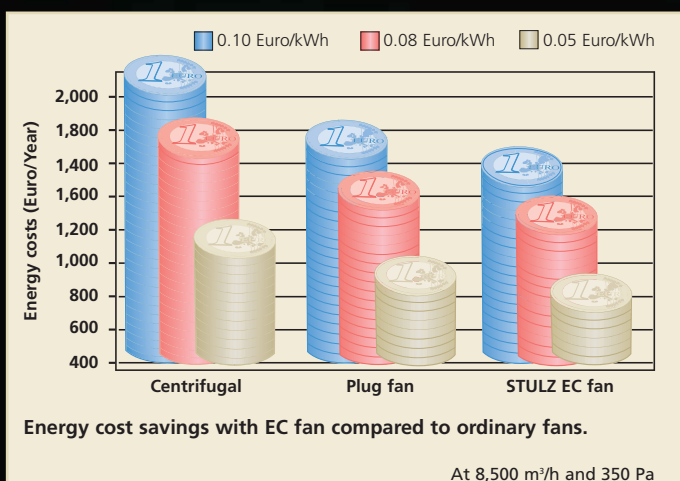

CyberAir EC fan technology

Nothing in the world comes close to it

The EC fan technology – electronically commutated motor – offers a breeze of fresh air with the new generation of high-performance compact CyberAir precision air condition units.

This new technology increases the efficiency of each CyberAir unit considerably reducing the operating costs. This is made possible by utilising modern electronics which together with the intelligent Controller C7000 allow for any given control variant and ensure a 24 hour optimised operation tuned to the prevalent ambient parameters.

All parameters, like volume flow, cooling capacity, external compression, noise level, can be optimised with each unit for the local conditions.


» **High efficiency with energy savings up to 30 % compared to standard fans**

» **Infinitely variable air volume setting via Controller C7000**

» **Long and maintenance-free operating life through direct drive technology**

» **Smooth air path and noise absorbing insulation reduces sound levels**

» **Anti-vibration-mounting isolates fan from unit structure**

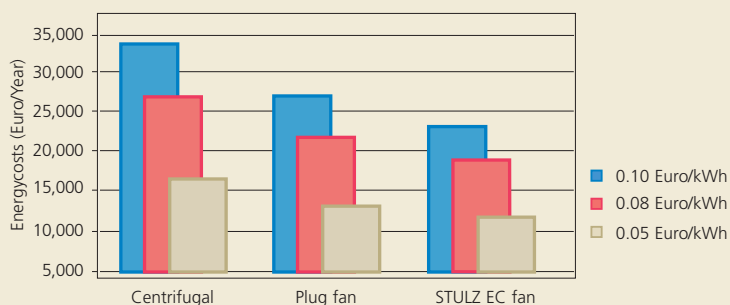

A typical example of the running cost savings of CyberAir's low energy EC fans compared with ordinary fans. A computer room with six ASD1200CW CyberAir units.


CyberAir

Perfect blend of design and materials

CyberAir's innovative design produces tangible benefits. Our engineers have one aim: The perfect blend of design and materials. Each design and component has been repeatedly tested. STULZ has specialised in the protection of critical systems for more than three decades. The result: More and more clients throughout the world trust our product and system solutions.


Sound absorption system

- » Absorption instead of reflection: Reduction of the sound pressure level through innovative use of sound absorbing materials
- » Silent operation through flow-optimised fan design
- » Intelligent, silent air ducting

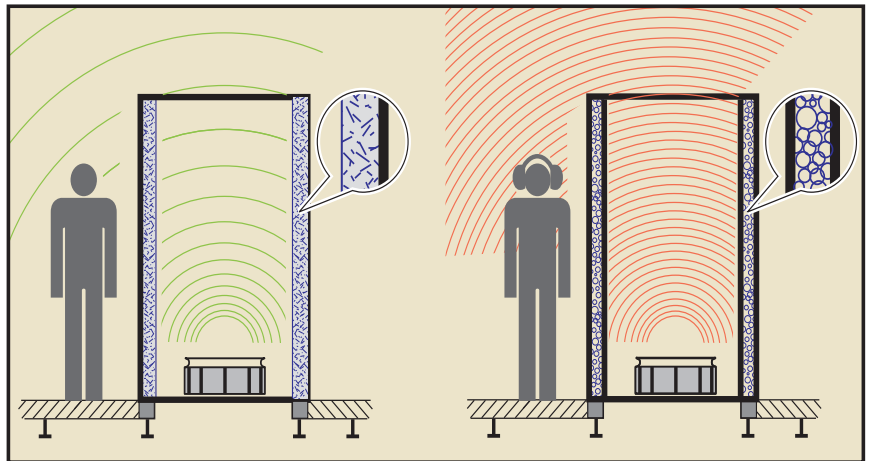

CyberAir's sound absorbing insulation has up to 5dBA noise reduction compared with double skin panels

- » STULZ Sound Absorption System reduces the sound levels by up to 5 dBA less than double skin panels
- » CyberAir units require $\geq 12\%$ less space for the same cooling capacity
- » CyberAir units offer the greatest possible protection for critical systems rooms

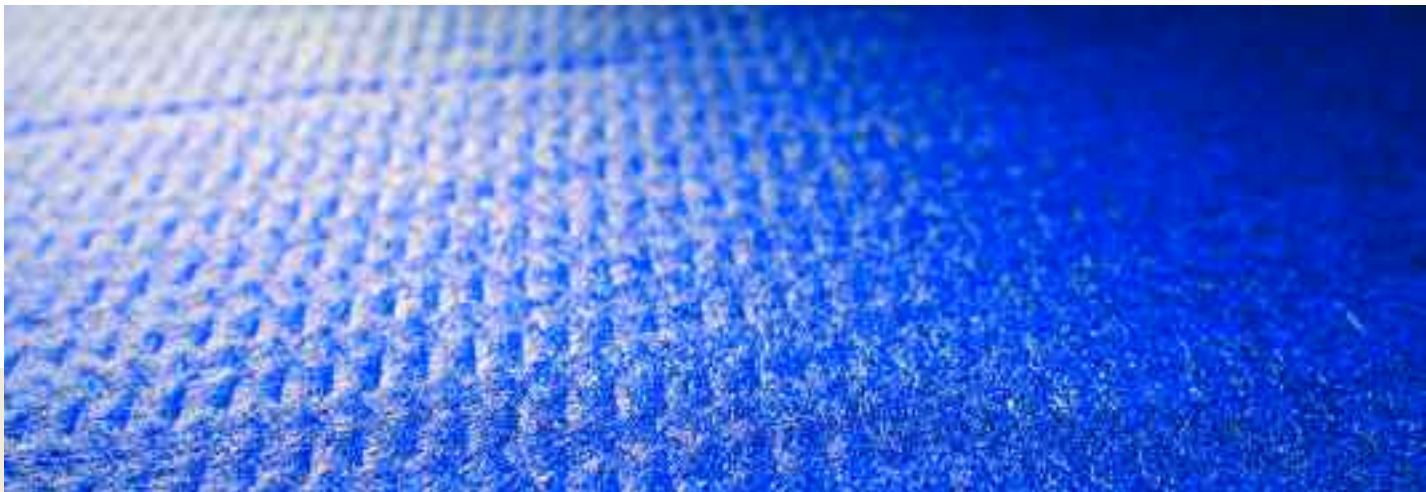

Sound absorption system
Absorption instead of reflection through targeted use of sound absorbing materials




Source: IBM Deutschland GmbH

Small footprint with new dimensions

- » Extremely favourable proportion of footprint and cooling capacity
- » Front maintenance access

High flexibility, smooth extension

- » The systems can be expanded to up to 31 units per room without additional hardware
- » It is possible to combine units of different size and capacity
- » Optimal air distribution and removal of spot heat loads
- » Units fit through standard doors and allow for easy transportation

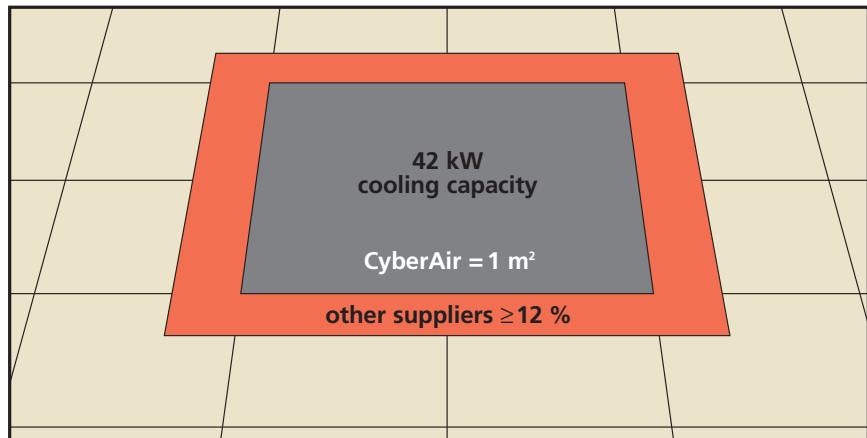


CyberAir footprint in relation to cooling capacity

Filter Control Management

- » Protection against low air flow and hot spots through intelligent fan control
- » A required filter change will automatically be indicated

Safety and high availability

- » High processing and material quality in every detail
- » Corrosion protection
- » High-quality components guarantee long service life
- » Automatic switch-over to stand-by unit during failure
- » Unit and component sequencing

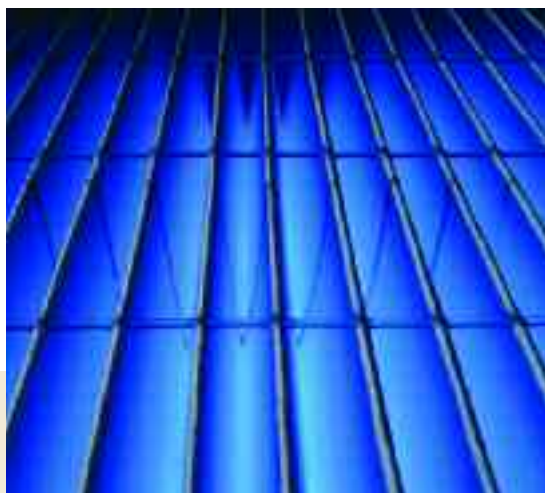

High efficiency G4 (EU4) Zig-Zag filters extend filter service intervals and reduce airflow resistance



Electric reheat with stainless steel sheath provides high capacity with low surface temperatures

CyberAir


Consistent development of modular design

Modular design has gained new significance with CyberAir. A proven system that not only provides maximum flexibility, but total security. Each CyberAir unit features its own stand alone intelligence and is unaffected by external failures. This safety is achieved through tailor-made, cost-effective modular redundancy; the VarioLogic System guarantees the automatic switch-over to reserve capacities or additional capacity during peak loads

The EC fan allows the air quantity to be easily adjusted and eliminate hot spots with better room air distribution. The ability to adjust air flow is of particular benefit to rooms housing the latest high density servers

Provision for trouble-free expansion

With increasing heat loads, CyberAir can be extended by adding further modules. Up to 31 units can be installed in one computer room and controlled via one C7000 VarioLogic System.

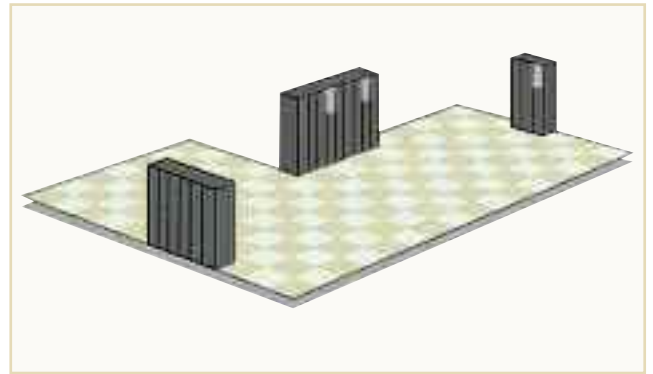


CyberAir GE2 – Indirect Free Cooling

A technology breakthrough


In the development of this new generation of indirect free cooling, CyberAir uses all available technology options to reduce energy costs and noise levels




Comparison of annual energy consumption between an air-cooled system (A) and a GE2 free cooling system

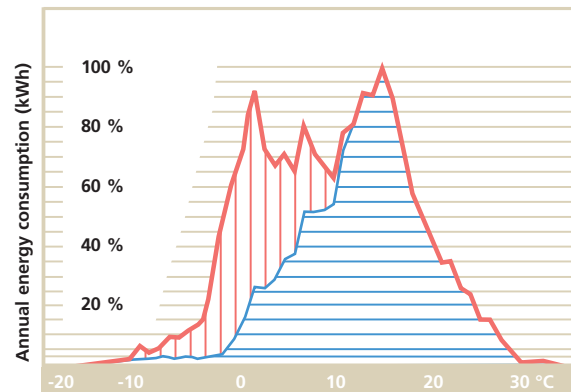


■ Energy consumption of GE2 system
■ Energy consumption of A system

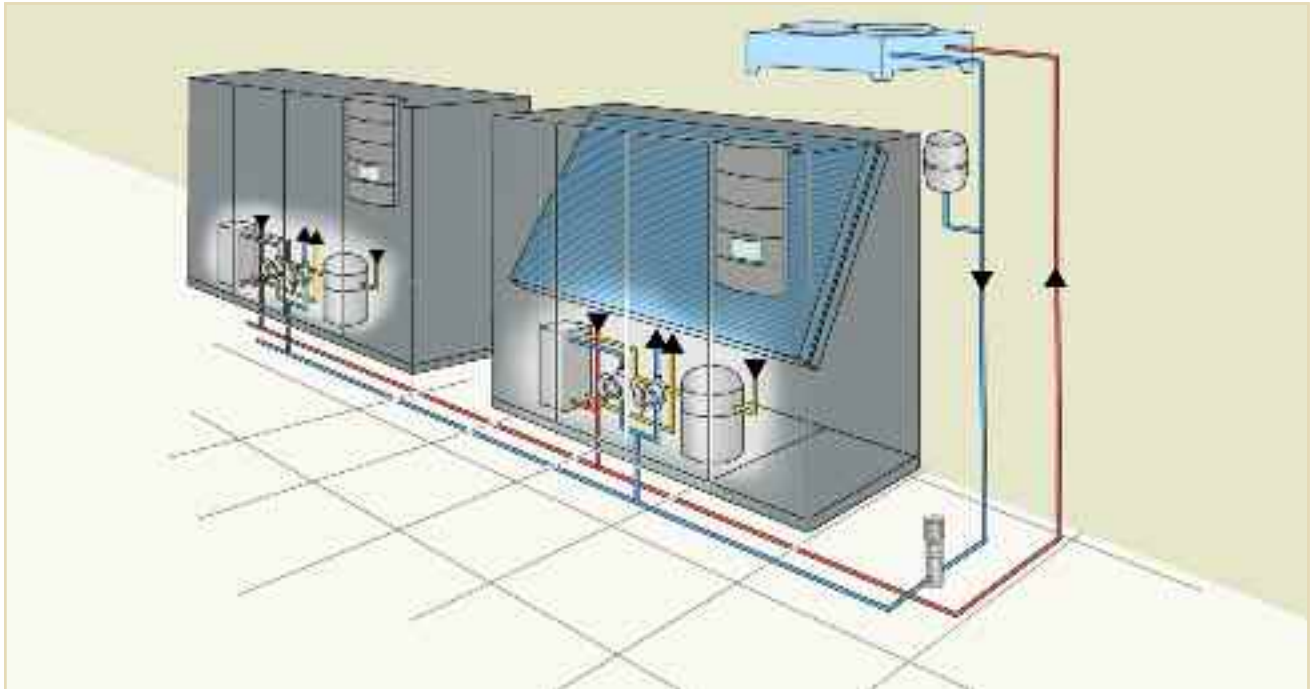


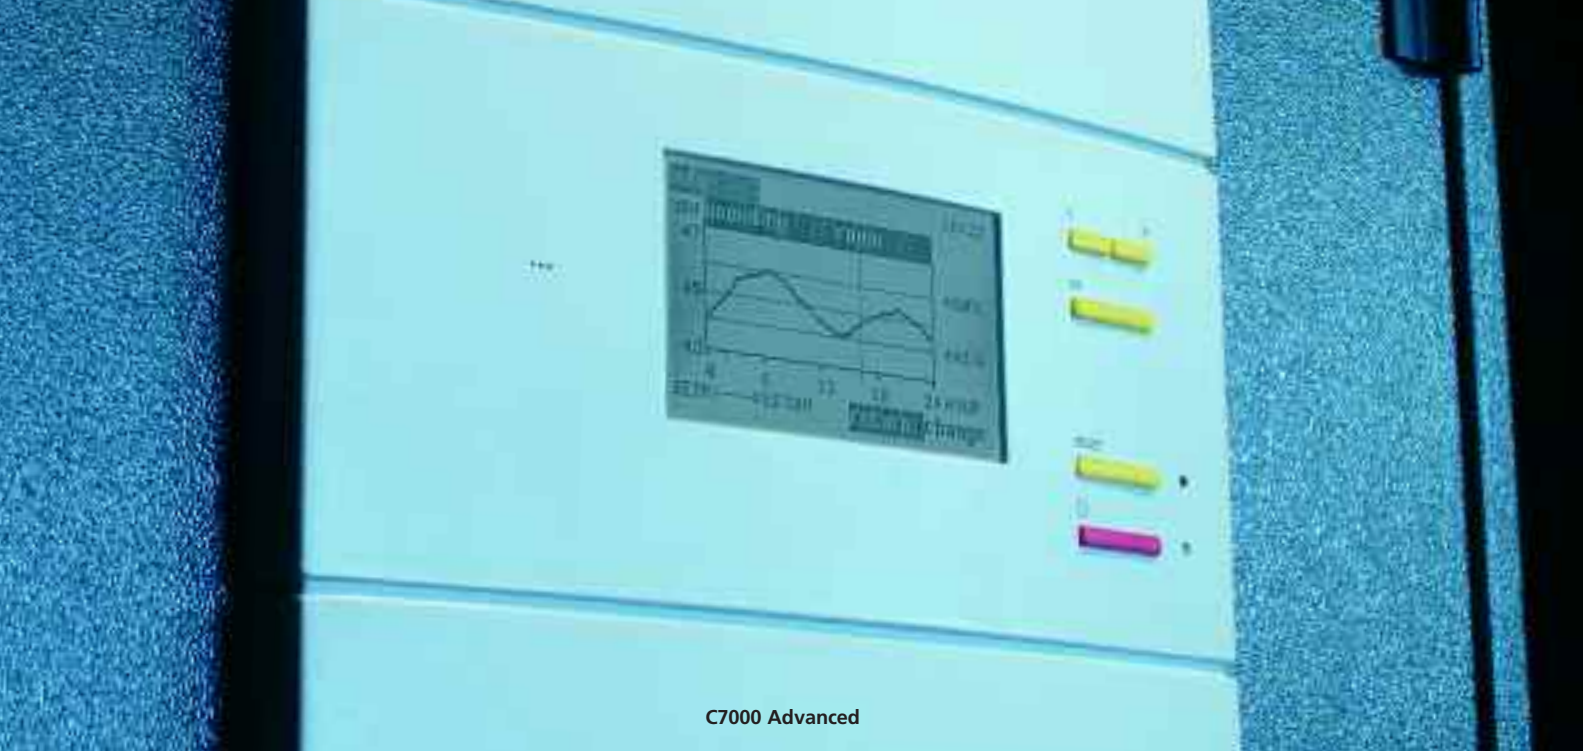

C7000 Advanced

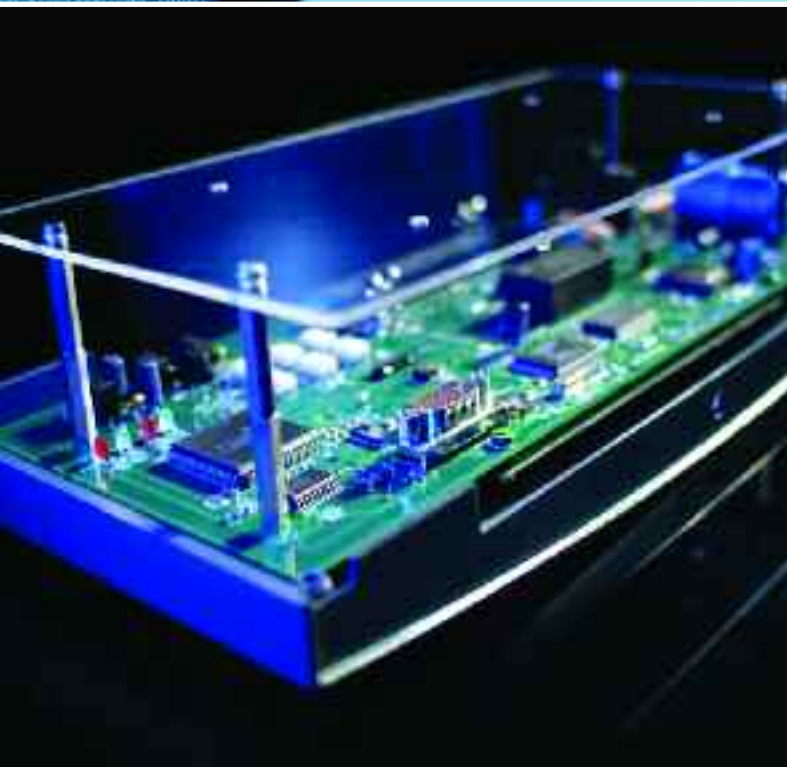

C7000 Plus

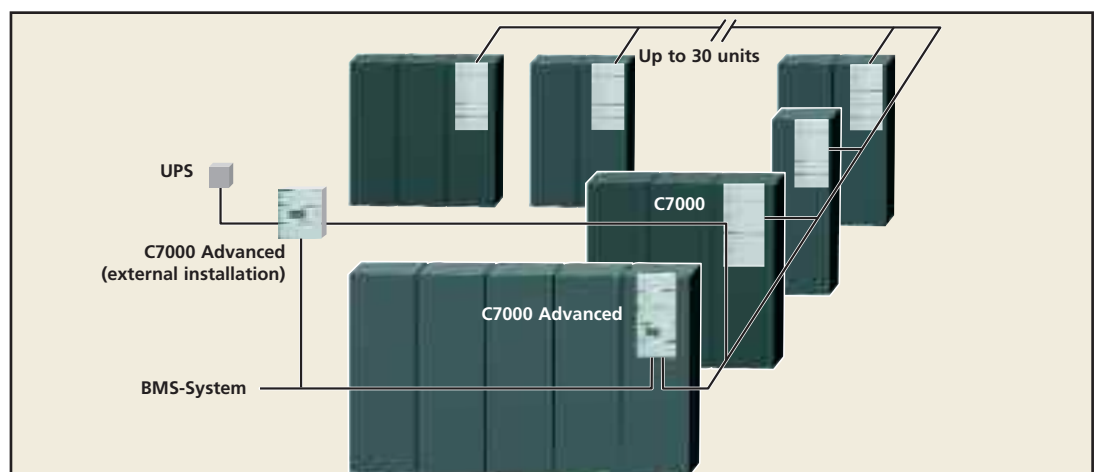

CyberAir C7000

Intelligent control with VarioLogic

STULZ VarioLogic provides security for current applications and future expansion requirements. Whether local or central control: with CyberAir's C7000 you always choose reliability.

Protection and safety for critical applications through intelligent control strategies

- » Sequencing strategies with up to 31 units
- » Operating hour compensation extends service life of components
- » One VarioLogic system can control up to 31 units within a room
- » Filter control management ensures constant air distribution
- » Refrigerant pressure management protects against system failure
- » Programmable UPS operation reduces electrical load when there is a power failure
- » Potential-free contacts for alarm and operating states permit easy remote monitoring
- » Scalable graphical recording of control values "temperature" and "humidity" between 1 and 1440 days
- » Event log recording the last 200 event

Connectivity

- » Connection to all BMS systems of well-established manufacturers
- » Connection to STULZ BMS systems TeleCompTrol
- » Communication via internet protocols SNMP and HTTP
- » SMS or email alarm messages via GSM modem
- » No additional hardware required

C7000 Advanced with high level user convenience

- » Simple firmware set up for individual applications
- » Configurable PI control
- » Display selectable in English and several foreign languages
- » Downloads available for the latest operating software
- » RS232 and RS485 interface for direct connecting of BMS
- » Manual operating mode for maintenance purposes

» C7000

Has all the control and monitoring functions but has no visual display and is tamper-proof. All control and service parameters can be read and adjusted from a separate display or laptop.

» C7000 Plus

As C7000, but with 4-line LCD operating panel for data entry and output. The C7000 Plus allows for up to 31 units to be configured and have their actual parameters displayed.

» C7000 Advanced

Convenient and comprehensive communication for up to 31 units. Operational control, management and monitoring via large LCD graphical display. Connection to all BMS systems possible. Modbus and other data protocols have already been implemented.



CyberAir Network solutions for limitless communication

- » Support of all current BMS protocols
- » Communication via IP protocols SNMP, HTTP
- » STULZ BMS system TeleCompTrol in bus and modem version




STULZ interfaces to BMS and the Internet

- » The STULZ MIB7000 (Multifunctional Interface Board)
 - Integrated sequencing function for up to 31 units
 - Interfaces RS485/RS232
 - Support of all current BMS protocols
- » The STULZ WIB7000 (Web Interface Board)
 - Communication via IP protocols SNMP, HTTP
 - Browser-based configuration and operation
- » The STULZ LIB7000 (Lon Interface Board)
 - LonWorks®-Technology for STULZ A/C Units

BMS supplier	Data protocol	Gateways for STULZ controllers		
		C7000 Advanced	C7000 + C7000Plus each with E-Bus	further STULZ controllers ¹⁾
STULZ, TeleCompTrol	SDC	OnBoard ³⁾	MIB7000	
Other suppliers	Modbus			
Kieback & Peter	P90			
Satchwell	SNP		MIB7000 ³⁾	MIB7000
TREND MICRO	Network-Bus			
Saia	S-Bus	MIB7000 ³⁾		
Other suppliers	BACnet	MIB7000 ³⁾		
LANDIS & STAefa	Ni-Bus	MIB7000 ³⁾		C4000 NiStulz
LonWorks®	LonTalk®	LIB7000 ³⁾	LIB7000 + MIB7000 ³⁾	LIB7000 + MIB7000
Other suppliers	SNMP	WIB7000		
Other suppliers	HTTP			
JOHNSON CONTROLS	N2-Bus	METASYS ²⁾³⁾		METASYS ²⁾
LANDIS & GYR	Unigyr-Bus	CFE ²⁾³⁾		CFE ²⁾
SIEMENS	Sinec L2-Bus	CP524 ²⁾³⁾		CP524 ²⁾


¹⁾ further controllers: C1002 C1010 C4000 C5000 C6000 ²⁾ Gateway from BMS supplier ³⁾ Available on request

¹⁾ further controllers: C1002, C1010, C4000, C5000, C6000 ²⁾ Gateway from BMS supplier ³⁾ Available on request

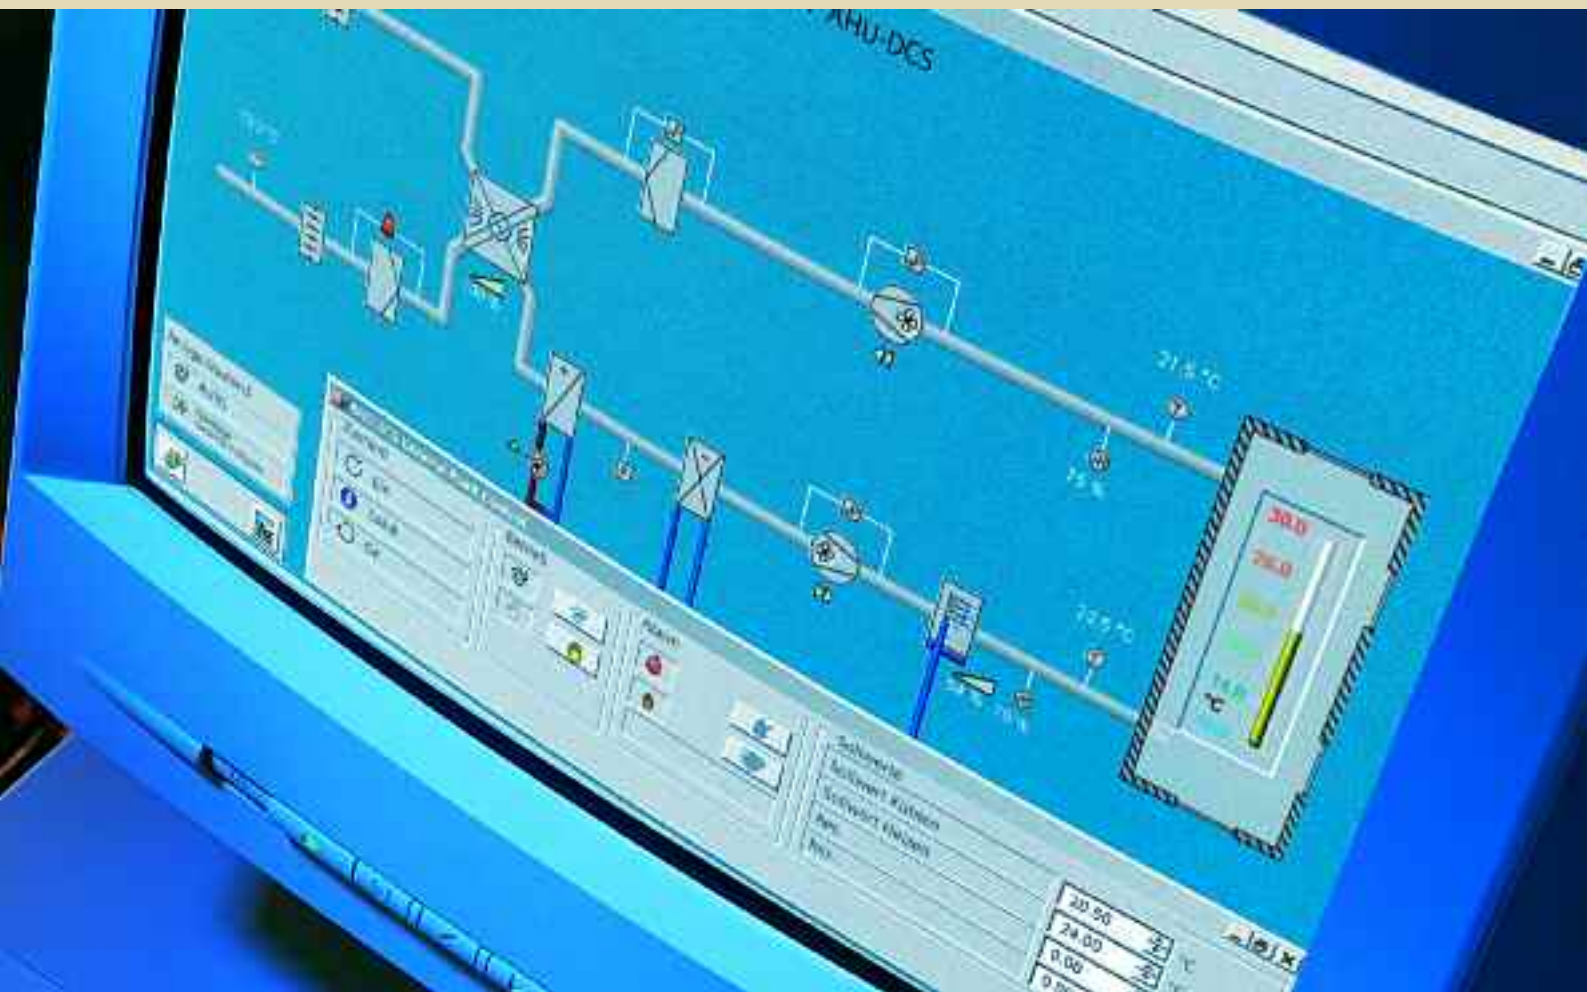


The STULZ BMS system TeleCompTrol

- » Monitoring and control of STULZ chillers and A/C units
- » Graphical display of all unit parameters
- » Monitoring, sending and storing of unit alarms
- » Alarm forwarding with error messages on PC or mobile phone via SMS

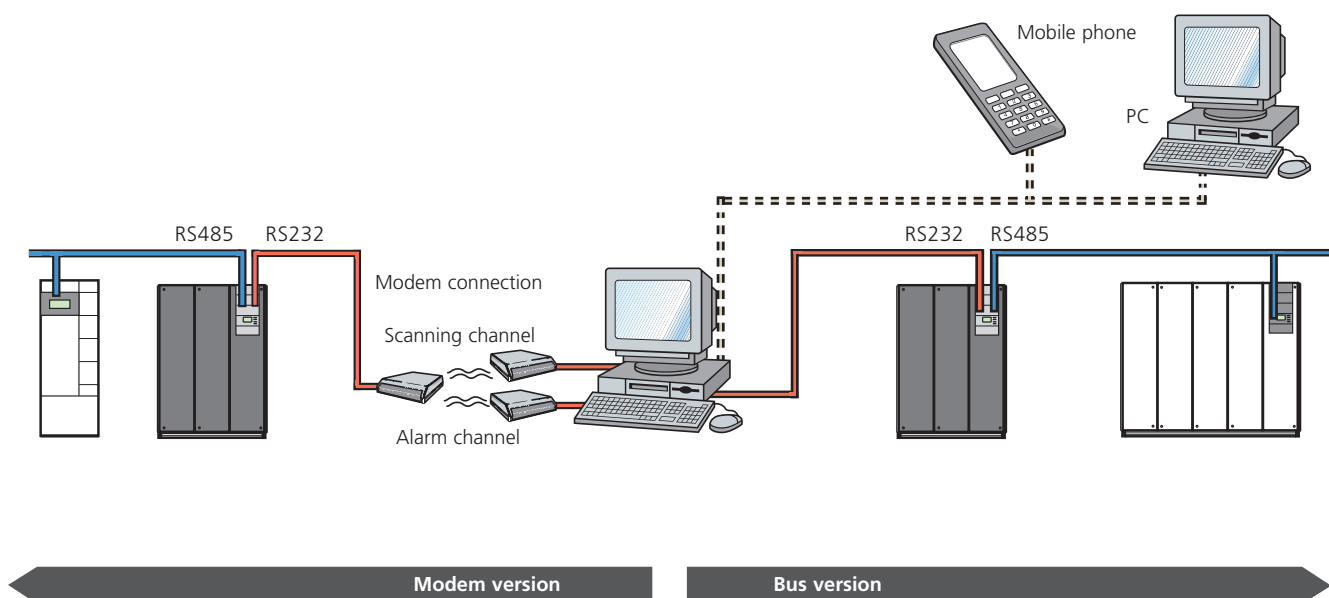


Options to suit every application



Mechanical and general options

- » Special paint finishes
- » Raised floor stand
- » Dampers
- » Flexible duct connection
- » Fresh air connection
- » High efficiency filter EU5
- » Exhaust chamber
- » Intake plenums for upflow units
- » Sound attenuators
- » Double skin panels and doors
- » Condensate pump




Humidifier options

- » Electrode Boiler Humidifier
- » Control of remote STULZ BNB humidifier

Option temperature sensor for room monitoring




Option humidifier

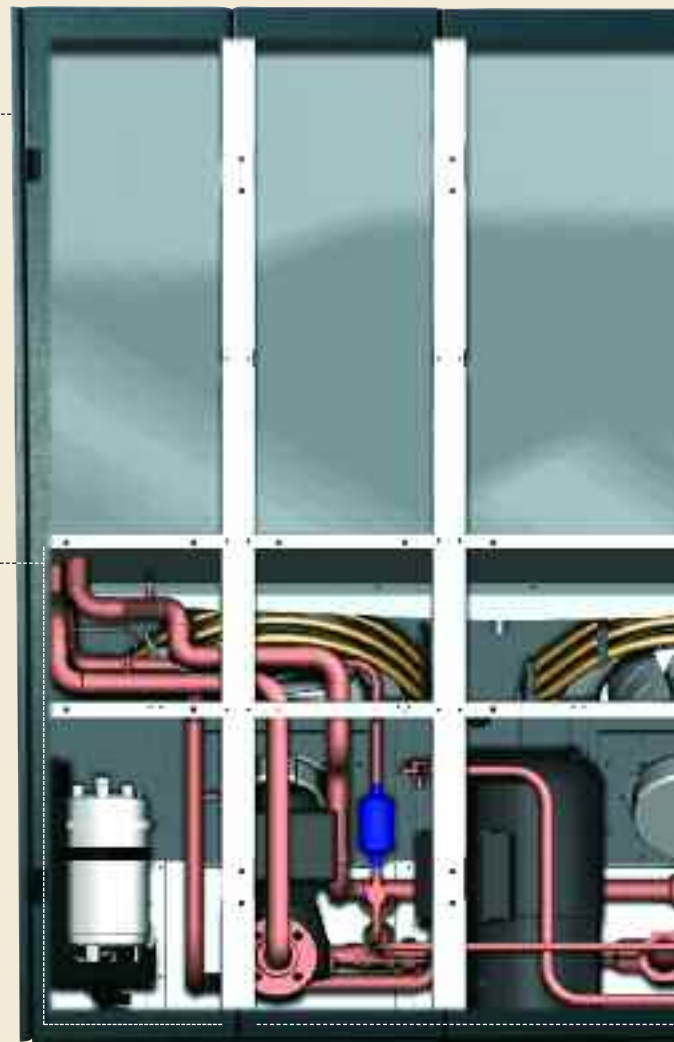


Optional EU5 zig-zag air filter






Control options

- » Fire detector
- » Smoke detector
- » Emergency fire shut-down
- » Water detector
- » Manual override
- » Automatic control of Dampers
- » Phase monitoring
- » Remote on/off control
- » Special voltages



Cooling options

- » Capacity control with electronic suction valve or hot gas bypass
- » 2-way valve
- » Microprocessor controlled 2- or 3-way valve head pressure control




Heating options

- » Electric heating, 1 to 3 stages or proportional
- » Hot gas reheat
- » Hot water reheat

Options for condensators (air cooled)

- » Electric fan speed control
- » Winter operation down to minus 45 °C
- » Coil corrosion protection

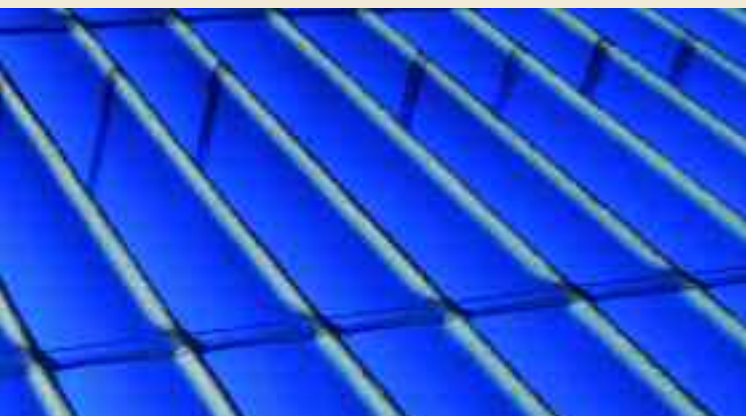

8 cooling systems: The perfect solution for every requirement

A-System

The air-cooled (A) direct expansion (DX) system uses refrigerant as the heat transfer medium. Room air re-circulates through the internally mounted CyberAir unit which houses the evaporator coil, scroll compressor and refrigeration system. A remotely mounted air-cooled condenser is connected, by specialist installers, to the room unit via a sealed refrigeration circuit such that the absorbed room heat load can be rejected to atmosphere.

G-System


The glycol/water cooled (G) version utilises the same refrigeration system as the type-A CyberAir unit and room air re-circulates through an evaporator coil. However an internally mounted plate condenser is then used to transfer the room heat load to a glycol solution. This condenser water acts as a secondary heat transfer medium, which is then pumped to a remotely mounted air-cooled drycooler or cooling tower where the heat is finally rejected to atmosphere. Generally the condenser water system is in the form of a ring main connected in parallel to a number of stand-alone CyberAir units mounted in the critical space.

GE1-System


The type GE low energy free-cooling system operates in an identical way to the type G system in summer with heat exchange to a condenser water ring main with remotely mounted drycooler. However the CyberAir GE design incorporates an additional free-cooling coil in parallel to the evaporator. Through an ingenious system of valves controlled by the STULZ C7000, all of the room heat load can be absorbed by the GE coil in low ambient temperatures. In the intermediate seasons, when the ambient temperature falls below the required room condition, the GE coil provides pre-cooling to reduce compressor run time. As compressors account for around 80 % of the CyberAir's energy input, the GE system significantly reduces running costs.

CW-System


When a central chilled water system, such as the STULZ CyberCool, is the appropriate method of heat rejection, CyberAir units are available in a packaged fan-coil design. Room air is recirculated through the CyberAir cooling coil, which transfers the heat load directly into the chilled water ring main. Water flow rate is regulated by a 2 or 3-way chilled water valve, controlled by the C7000, to precisely maintain conditions in the critical space.

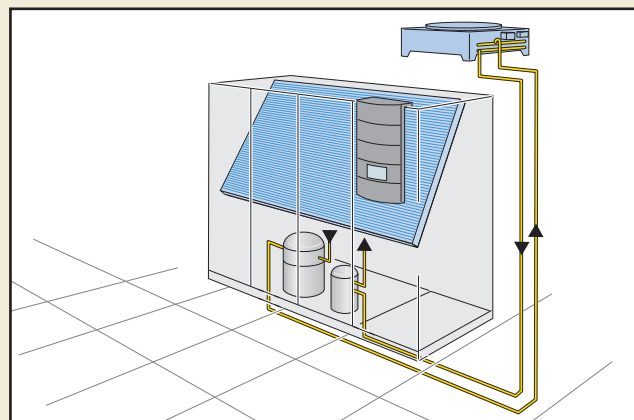


A-System

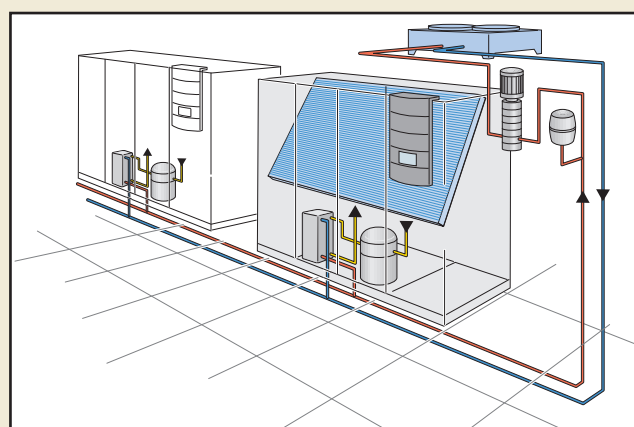


G-System

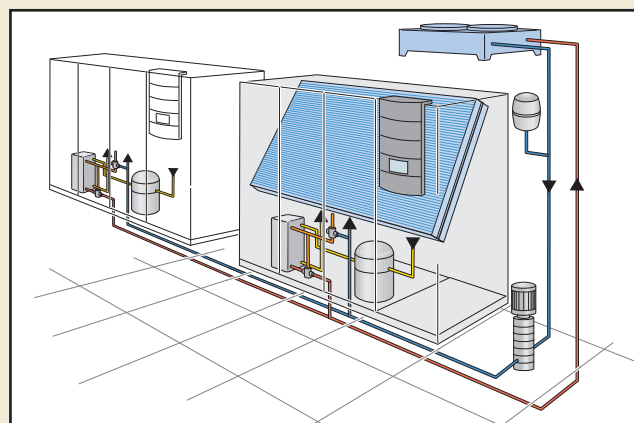


GE1-System

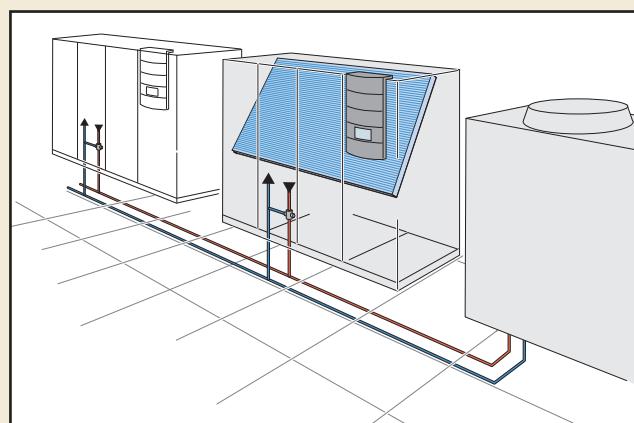


CW-System

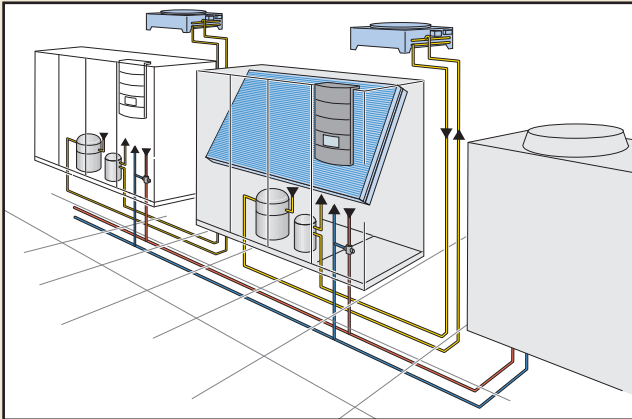


ACW-System

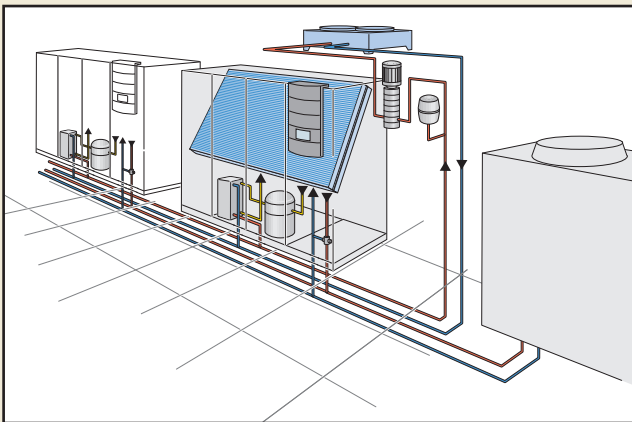

GCW-System

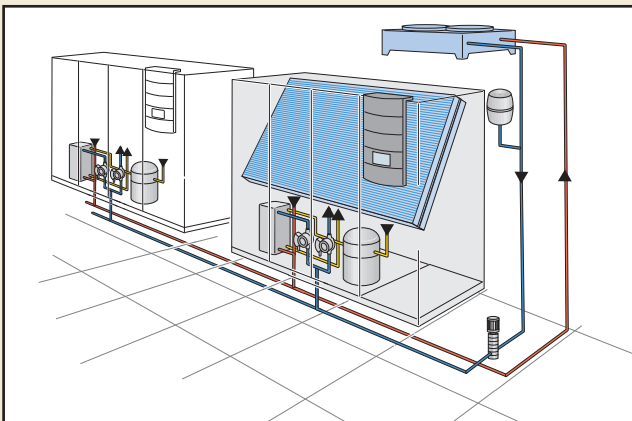

GE2-System

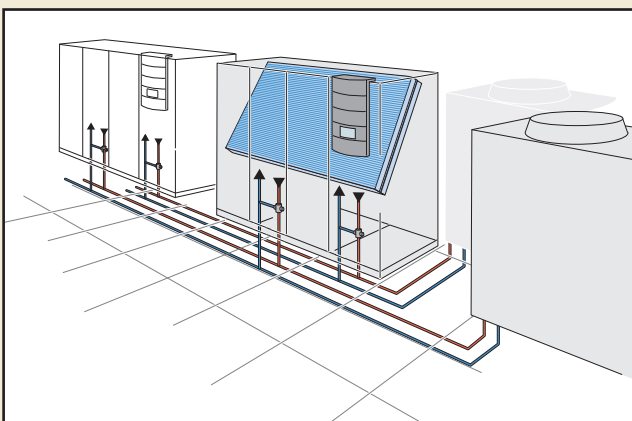

CW2-System

ACW-System

The ACW CyberAir system is a combination of both the "A" and "CW" systems with two cooling coils. The C7000 manages the ACW system to allow the air cooled "A" system to operate as standby to the "CW" chilled water system or vice versa to give added security and back up to the computer room.

GCW-System

The GCW CyberAir system is a combination of both the "G" and "CW" systems with two cooling coils. The C7000 manages the GCW system to allow the glycol cooled or condenser water "G" system to operate as standby to the "CW" chilled water system or vice versa to give added security and back up to the computer room.

GE2-System

The GE2 system is a Freecool system similar to the GE1 system using outdoor air in winter to cool glycol and save running the compressors. With GE2 the C7000 controls inverter driven variable speed pumps instead of the system of valves saving even more energy by efficient pumping of the glycol with a lower pressure drop. A small external pump covers the remaining pressure drop of the pipework and the drycooler.

CW2-System

The CyberAir unit in CW2 has two independent cooling coils and control valves and can take chilled water from two independent systems. The system can provide added back up and security. A typical application is to use the central building chilled water system as the primary chilled water source with a STULZ CyberCool chiller as the secondary chilled water source to operate when the central system is not available for example at weekends or over-night.

Technical specifications

CyberAir

DX and Dualfluid-Units, single circuit (1 compressor)											
ASD/ASU xxx A/G/GE1/ACW/GCW			171	201	241	301	351	431	521	661	791
DX-Cooling capacity (total) ¹⁾		kW	18.0	20.8	25.8	31.5	36.0	45.0	53.2	70.8	85.7
DX-Cooling capacity (sensible) ¹⁾		kW	18.0	20.8	24.5	29.9	34.2	45.0	49.5	64.4	71.9
CW-Cooling capacity (total) ²⁾		kW	19.5	22.4	26.8	33.1	38.6	51.2	56.0	75.5	78.6
CW-Cooling capacity (sensible) ²⁾		kW	18.0	20.6	24.4	30.0	34.7	45.6	49.5	66.3	69.0
Airflow		m³/h	5,200	6,000	7,200	8,500	9,900	12,800	14,000	19,000	20,000
Compressor absorbed power		kW	3.7	4.2	5.3	6.4	7.2	9.2	11.0	14.6	18.3
A.G-System	Down	Max. av. ESP	Pa	700	610	420	260	310	460	340	190
		Noise Level ³⁾	dBA	46.2	49.3	53.2	51.8	55.5	54.1	56.0	57.4
		Fan absorbed power	kW	0.5	0.8	1.3	1.2	1.9	2.3	3.0	4.1
	Upflow	Max. av. ESP	Pa	660	560	350	250	290	280	180	260
		Noise Level ³⁾	dBA	48.5	50.8	53.8	52.7	55.7	51.7	53.2	58.0
		Fan absorbed power	kW	0.6	1.0	1.6	1.3	2.1	2.4	3.1	4.5
GE1,ACW,GCW	Down	Max. av. ESP	Pa	640	530	300	440	200	410	290	80
		Noise Level ³⁾	dBA	47.1	50.1	53.9	52.4	55.7	54.5	56.4	57.8
		Fan absorbed power	kW	0.6	1.0	1.6	1.5	2.3	2.6	3.4	4.8
	Upflow	Max. av. ESP	Pa	610	480	240	420	180	210	340	50
		Noise Level ³⁾	dBA	49.4	51.7	54.7	53.3	55.9	53.3	55.0	58.3
		Fan absorbed power	kW	0.8	1.2	1.9	1.6	2.5	2.9	3.7	5.2
Size			1	1	1	2	2	3	3	4	4

DX and Dualfluid-Units, double circuit (2 compressors)											
ASD/ASU xxx A/G/GE1/ACW/GCW			222	272	332	442	482	602	692	852	1052
DX-Cooling capacity (total)¹⁾		kW	23.2	29.7	34.9	46.3	51.5	63.8	72.2	87.3	104.3
DX-Cooling capacity (sensible)¹⁾		kW	23.2	29.7	34.9	42.9	47.9	60.2	66.3	76.7	88.7
CW-Cooling capacity (total)²⁾		kW	25.5	35.5	38.6	47.6	54.0	68.6	75.1	88.9	97.8
CW-Cooling capacity (sensible)²⁾		kW	23.0	32.0	34.7	42.6	47.9	60.8	66.0	76.3	84.4
Airflow		m³/h	6,600	9,100	9,900	11,900	13,500	17,300	18,900	21,000	24,000
Compressor absorbed power		kW	4.6	5.6	7.2	9.6	10.6	12.8	14.4	18.4	22.0
A.G-System	Down	Max. av. ESP	Pa	520	170	310	530	390	160	290	200
Noise Level³⁾	dBA	51.3	53.3	55.5	52.6	55.3	55.1	57.3	56.5		
Fan absorbed power	kW	1.0	1.4	1.9	1.9	2.7	3.0	4.0	4.0		
Upflow	Max. av. ESP	Pa	470	150	290	340	220	140	260	350	
Noise Level³⁾	dBA	52.4	53.9	55.7	50.6	52.6	56.1	57.9	54.2		
Fan absorbed power	kW	1.2	1.6	2.1	2.0	2.8	3.4	4.4	3.8		
GE1,ACW,GCW	Down	Max. av. ESP	Pa	420	80	200	490	340	340	190	90
Noise Level³⁾	dBA	52.1	53.6	55.7	52.9	55.6	55.8	57.7	57.1		
Fan absorbed power	kW	1.3	1.8	2.3	2.1	3.0	3.6	4.7	4.7		
Upflow	Max. av. ESP	Pa	370	60	180	280	380	320	170	430	
Noise Level³⁾	dBA	53.3	54.2	55.9	52.1	54.4	56.7	58.2	55.5		
Fan absorbed power	kW	1.5	1.9	2.5	2.3	3.3	4.0	5.1	4.6		
Size			1	2	2	3	3	4	4	5	5


Note: All data valid for 400V/3ph/50Hz with 20Pa ESP (external static pressure) at downflow units and 50Pa ESP at upflow units

¹⁾ Evaporator capacity for A,G,GE,ACW,GCW-Units ; Return air: 24 °C, 50 % r. H.

²⁾ CW-coil capacity for ACW,GCW-Units ; Return air: 24 °C, 50 % r. H. ; Water temperature: 7 °C/12 °C

³⁾ Sound Pressure level at 2 m distance, free field

Dimensions / Weight / No of fans					
Size		1	2	3	4
Width	mm	1,000	1,400	1,750	2,150
Height	mm	1,980	1,980	1,980	1,980
Depth	mm	890	890	890	890
Weight A/ACW (max. per size)	kg	406/451	484/534	710/765	786/846
Weight G/GCW, GE1, GE2 (max. per size)	kg	435/465	545/580	780/820	885/958
No of fans		1	1	2	2

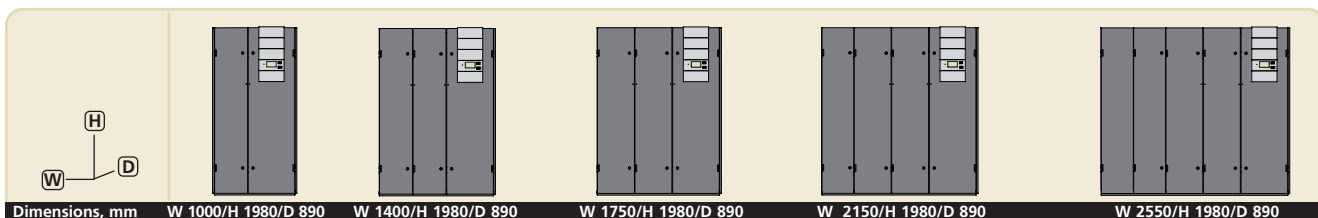

Technical specifications

CyberAir

LowNoise DX and Dualfluid-Units, single circuit (1 compressor)												
ALD/ALU xxx A/G/GE2		171	201	241	301	351	431	521	661	791		
DX-Cooling capacity (total) ¹⁾		kW	18.1	21.0	26.3	32.5	36.3	45.1	54.8	70.7	85.9	
DX-Cooling capacity (sensible) ¹⁾		kW	17.9	21.0	24.8	30.9	35.9	45.1	49.6	64.2	73.7	
CW-Cooling capacity (total) ²⁾		kW	18.8	21.8	26.5	32.4	37.5	46.3	53.4	75.0	87.4	
CW-Cooling capacity (sensible) ²⁾		kW	17.5	20.3	24.4	29.9	34.4	42.8	48.1	65.4	73.7	
Airflow		m³/h	4,900	5,800	6,900	8,500	9,900	12,500	13,500	17,700	19,600	
Compressor absorbed power		kW	3.7	4.2	5.3	6.4	7.2	9.2	11.0	14.6	18.3	
A, G-System	Down	Max. av. ESP	Pa	590	540	450	730	670	460	410	590	500
		Noise Level ³⁾	dBA	40.1	43.6	47.3	45.5	48.7	48.1	49.7	52.8	55.0
		Fan absorbed power	kW	0.2	0.4	0.6	0.7	1.1	1.2	1.5	2.4	3.3
	Upflow	Max. av. ESP	Pa	580	530	440	520	450	450	400	640	570
		Noise Level ³⁾	dBA	43.6	46.2	49.1	45.4	47.7	50.7	52.0	51.6	53.3
		Fan absorbed power	kW	0.3	0.5	0.8	0.8	1.2	1.4	1.7	2.4	3.2
GE2	Down	Max. av. ESP	Pa	560	500	400	710	640	420	360	530	420
		Noise Level ³⁾	dBA	40.4	43.9	47.6	45.9	49.1	48.6	50.2	53.5	55.6
		Fan absorbed power	kW	0.3	0.5	0.8	0.8	1.2	1.4	1.7	2.8	3.8
	Upflow	Max. av. ESP	Pa	550	490	380	490	410	410	350	590	500
		Noise Level ³⁾	dBA	44.1	46.7	49.5	47.0	49.3	51.2	52.4	52.7	54.3
		Fan absorbed power	kW	0.4	0.6	0.9	1.0	1.4	1.6	2.0	2.9	3.8
Size			2	2	2	3	3	4	4	5	5	

LowNoise DX and Dualfluid-Units, double circuit (2 compressors)										
ALD/ALU xxx A/G/GE2		222	272	332	442	482	602	692		
DX-Cooling capacity (total) ¹⁾		kW	23.4	29.8	35.6	46.9	53.3	63.6	72.9	
DX-Cooling capacity (sensible) ¹⁾		kW	23.4	29.8	35.3	43.0	48.2	60.3	66.4	
CW-Cooling capacity (total) ²⁾		kW	24.4	31.5	36.6	45.9	51.7	69.9	77.4	
CW-Cooling capacity (sensible) ²⁾		kW	22.8	29.9	33.6	41.7	46.7	62.0	67.5	
Airflow		m³/h	6,600	8,800	9,700	11,700	13,100	17,100	18,400	
Compressor absorbed power		kW	4.6	5.6	7.2	9.6	10.6	12.8	14.4	
A, G-System	Down	Max. av. ESP	Pa	480	720	680	500	430	620	560
		Noise Level ³⁾	dBA	46.4	46.2	48.2	46.7	49.1	52.0	53.6
		Fan absorbed power	kW	0.6	0.8	1.1	1.0	1.3	2.2	2.7
	Upflow	Max. av. ESP	Pa	470	510	460	490	420	430	380
		Noise Level ³⁾	dBA	48.4	45.9	47.4	49.6	51.5	50.9	52.0
		Fan absorbed power	kW	0.7	0.9	1.2	1.2	1.6	2.2	2.6
GE2	Down	Max. av. ESP	Pa	430	700	650	460	390	560	490
		Noise Level ³⁾	dBA	46.7	46.6	48.6	46.9	49.6	52.7	54.3
		Fan absorbed power	kW	0.7	0.9	1.2	1.2	1.6	2.6	3.2
	Upflow	Max. av. ESP	Pa	420	470	420	450	380	610	560
		Noise Level ³⁾	dBA	48.8	47.5	48.9	50.1	51.9	52.2	53.3
		Fan absorbed power	kW	0.8	1.0	1.3	1.4	1.8	2.6	3.2
Size			2	3	3	4	4	5	5	

Note: All data valid for 400V/3ph/50Hz with 20Pa ESP (external static pressure) at downflow units and 50Pa ESP at upflow units

¹⁾ Evaporator capacity for A,G,GE-Units ; Return air: 24 °C, 50 % r. H.

²⁾ CW-coil capacity for GE2-Units ; Return air: 24 °C, 50 % r. H. ; Water inlet temperature: 7 °C

³⁾ Sound Pressure level at 2 m distance, free field

Humidifier capacity and el. heating capacity						
Size		1	2	3	4	5
Humidifier capacity	kg/h	5	8	8	8	15
max. no. of heating steps		3	3	3	3	3
Heating capacity Step 1	kW	4/9	4/9	4/9	4/9	4/9
Heating capacity Step 2	kW	4	4	4/9	4/9	4/9
Heating capacity Step 3	kW	4	4	4	4	4/9
max. total heating capacity	kW	12	12	18	18	27

Technical data subject to change without notice.







Technical specifications

CyberAir CW

CW-Units (1 chilled water circuit)													
ASD/ASU xxx CW			300	400	500	660	740	900	960	1100	1200	1500	
CW-Cooling capacity (total) ²⁾		kW	30.1	38.8	54.1	68.1	75.5	89.8	101.8 ⁴⁾	114.7 ⁴⁾	121.0 ⁴⁾	146.2 ⁴⁾	
CW-Cooling capacity (sensible) ²⁾		kW	25.6	33.1	43.0	54.9	63.9	75.7	82.0 ⁴⁾	92.6 ⁴⁾	99.0 ⁴⁾	120.1 ⁴⁾	
Airflow		m³/h	6,500	8,500	10,000	13,000	16,000	19,000	19,500	22,000	24,000	29,000	
CW-System	Down	Max. av. ESP	Pa	420	140	670	450	410	140	330	70	410	110
		Noise Level ³⁾	dBA	46.0	51.6	48.8	54.5	54.5	58.2	57.8	60.4	55.6	59.7
		Fan absorbed power	kW	0.7	1.6	1.1	2.4	3.1	5.1	3.6	5.2	4.6	8.0
	Upflow	Max. av. ESP	Pa	400	370	650	430	400	120	330	60	370	120
		Noise Level ³⁾	dBA	48.5	53.1	50.7	55.0	55.8	58.6	58,4	60.5	57.0	59.6
		Fan absorbed power	kW	0.8	1.8	1.3	2.7	3.4	5.5	3.9	5.5	5.4	8.3
		Size			1	1	2	2	3	3	4	4	5
CW2-Units (2 chilled water circuits)													
ASD/ASU xxx CW2			330	560	650	950	1200						
CW-Cooling capacity (total) ²⁾		kW	26.0	48.8	62.7	78.6	103.0						
CW-Cooling capacity (sensible) ²⁾		kW	24.0	43.5	55.1	69.0	89.3						
Airflow		m³/h	7,500	13,000	16,000	20,000	26,000						
CW2-System	Down	Max. av. ESP	Pa	410	360	240	100	220					
		Noise Level ³⁾	dBA	51.4	55.4	56.4	58.8	58.1					
		Fan absorbed power	kW	1.5	2.9	4.3	5.4	6.8					
	Upflow	Max. av. ESP	Pa	260	300	190	90	210					
		Noise Level ³⁾	dBA	54.9	56.3	57.2	61.7	58.5					
		Fan absorbed power	kW	1.9	3.4	4.9	5.7	7.2					
		Size			1	2	3	4	5				
Note: All data valid for 400V/3ph/50Hz with 20Pa ESP (external static pressure) at downflow units and 50Pa ESP at upflow units													
²⁾ CW-coil capacity for CW,CW2-Units ; Return air: 24 °C, 50 % r. H. ; Water temperature: 7 °C/12 °C													
³⁾ Sound Pressure level at 2 m distance, free field													
⁴⁾ Indicated data for downflow units. Cooling capacity for upflow units is approx. 10 % less. For details see StulzSelect.													

Humidifier capacity and el. heating capacity						
Size		1	2	3	4	5
Humidifier capacity	kg/h	5	8	8	8	15
Max. no. of heating steps		3	3	3	3	3
Heating capacity Step 1	kW	4/9	4/9	4/9	4/9	4/9
Heating capacity Step 2	kW	4	4/9	4/9	4/9	4/9
Heating capacity Step 3	kW	4	4	4	4	4/9
Max. total heating capacity	kW	12	18	18	18	27

Dimensions / Weight / No of fans						
Size		1	2	3	4	5
Width	mm	1,000	1,400	1,750	2,150	2,550
Height	mm	1,980	1,980	1,980	1,980	1,980
Depth	mm	890	890	890	890	890
Weight CW/CW2 (max. per size)	kg	307/357	362/442	547/577	568/608	755/795
No of fans		1	2	2	2	3

					
Dimensions, mm	W 1000/H 1980/D 890	W 1400/H 1980/D 890	W 1750/H 1980/D 890	W 2150/H 1980/D 890	W 2550/H 1980/D 890

Technical data subject to change without notice.

You can trust STULZ

Competency in consultation and planning



Early planning support and expert advice sets the course for achieving the best possible project solution. STULZ is renowned for its dependable applications advice, with 35 years of experience in air conditioning technology. Through load calculations and energy analysis for CyberAir STULZ can assist the planning engineer and system designer with project development.

Rapid installation and commissioning

CyberAir units are of a compact design that is factory assembled and pre-wired to offer a fully packaged solution ready for connection to power and water services.

This ensures a rapid and uncomplicated installation for the Contractor and very straightforward commissioning. The EC fan can easily be adjusted on site to precisely match the required local operating conditions. In addition, STULZ specialists are happy to assist with commissioning, testing and certification.

Professional documentation

To assist the planning engineer and system designer from tender submission to project completion, STULZ provides professional documentation in form of technical manuals, planning software and layout drawings.



- » **Expert advice and planning support**
- » **Rapid installation and commissioning**
- » **Customer service without delay**
- » **Professional documentation**



Customer service without delay

CyberAir units are manufactured from high-quality materials and components that have been checked and repeatedly tested during production. In the unlikely event of a fault, STULZ customer service is available at all times to ensure the continuous availability of the system.

STULZ air conditioning technology

Creating value – implementing visions



Competency

- » Trend-setting in air conditioning technology
- » International specialist know-how
- » Innovations as client benefit



Reliability

- » Quality which keeps its promise
- » Promises which are reliable
- » Customer proximity, providing safety



Globality

- » Global cooperation
- » International production location
- » Global distribution and service network



Responsibility

- » Forward-looking thought and action
- » Responsibility for people – safety for technology
- » Environmentally aware development – preserving resources

STULZ HEADQUARTER

D **STULZ GmbH**
Holsteiner Chaussee 283 • 22457 Hamburg
Sales Germany, Tel.: +49(40)55 85-306
Sales International, Tel.: +49(40)55 85-269
Fax: +49(40)55 85-308 • products@stulz.de

STULZ SUBSIDIARIES

AUS **STULZ AUSTRALIA PTY LTD**
Unit 21, 287 Victoria Rd • Rydalmere NSW 2116
Tel.: +61(2)96 38 70 00 • Fax: +61(2)96 38 70 22 • sales@stulz.com.au

E **STULZ ESPAÑA S.A.**
Calle Lluvia Nº 1 • 28918 Leganés (Madrid)
Tel.: +34(91)517 83 20 • Fax: +34(91)517 83 21 • info@stulz.es

F **STULZ FRANCE S. A. R. L.**
107, Chemin de Ronde • 78290 Croissy-sur-Seine
Tel.: +33(1)34 80 47 70 • Fax: +33(1)34 80 47 79 • info@stulz.fr

GB **STULZ U. K. LTD.**
First Quarter • Blenheim Rd. • Epsom • Surrey KT 19 9 QN
Tel.: +44(1372)74 96 66 • Fax: +44(1372)73 94 44 • sales@stulz.co.uk

I **STULZ S.P.A.**
Via Torricelli, 3 • 37067 Valeggio sul Mincio (VR)
Tel.: +39(045)633 16 00 • Fax: +39(045)633 16 35 • info@stulz.it

IN **STULZ-CHSPL PVT. LTD.**
006, Jagruti Industrial Estate • Mogul Lane, Mahim • Mumbai - 400 016
Tel.: +91(22) 56 66 94 46 • Fax: +91(22) 56 66 94 48 • info@stulz.in

NL **STULZ GROEP B. V.**
Industriecentrum Bovenkerk • Postbus 75 • 1180 AB Amstelveen
Tel.: +31(20)54 51 111 • Fax: +31(20)64 58 764 • stulz@stulz.nl

PL **STULZ POLSKA SP. Z O.O.**
ul. Włodarzewska 69 • 02 – 384 Warszawa
Tel.: +48(22)883 30 80 • Fax: +48(22)824 26 78 • info@stulz.pl

USA **STULZ AIR TECHNOLOGY SYSTEMS (SATS), INC.**
1572 Tilco Drive • Frederick, MD 21704
Tel.: +1(301)620 2033 • Fax: +1(301)662 5487 • info@stulz-ats.com

STULZ the natural choice

Close to you worldwide.

... with expert contacts in our STULZ subsidiaries, and our exclusive global network of sales and service partners. Our five production plants are in Europe, North America and Asia.